


## TUBLUESTREAM epdm

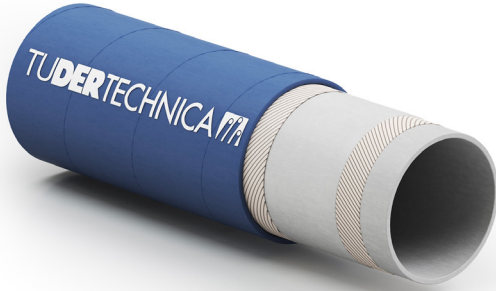

**TEMPERATURE:** -40°C / +164°C ( -40°F / +327°F )

The operating temperature of the hose is directly dependent upon the specific fluid been conveyed, the length of time the fluid is in contact with the hose and the working pressure. For longer life, drain after use

**NORM:** ISO 1307 for dimensional tolerances



Delivery hose suitable for cleaning plant and equipment with hot water mixed with steam. Manufactured according to GMP (Reg. (CE) 2023/2006).

### TUBE

EPDM, white, phthalates free, tested in compliance with 1907/2006/CE (REACH). Tube tested according to the main norms for food contact materials. Meets FDA 21 CFR 177.2600; BfR XXI cat. 2; DM 21/03/1973 and subsequent amendments; REGULATION 1935/2004/CE; Japan Ministry of Health and Welfare Notice No.370,1959 and No.201,2006; 3-A RPSCQC for (62-02) Hose Assemblies.

### REINFORCEMENT

Synthetic plies.

### COVER

Smooth, blue, pin pricked, cloth finish. Abrasion, ageing and ozone resistant.

Refer to guidelines for cleaning and sanitizing on [TUDERTECHNICA.COM](http://TUDERTECHNICA.COM)

Inside diameter		Outside diameter		Working pressure (164°C)		Working pressure (95°C)		Burst pressure		Appr. Weight		Bending radius	
mm	in	mm	in	bar	psi	bar	psi	bar	psi	kg/mt	lbs/ft	mm	in
10	0,39	20	0,79	6	90	20	300	60	900	0,29	0,19	-	-
13	0,50	23	0,91	6	90	20	300	60	900	0,35	0,23	-	-
16	0,63	26	1,02	6	90	20	300	60	900	0,41	0,27	-	-
19	0,75	31	1,22	6	90	20	300	60	900	0,60	0,40	-	-
25	1,00	39,5	1,56	6	90	20	300	60	900	0,93	0,62	-	-
32	1,25	46,5	1,83	6	90	20	300	60	900	1,16	0,78	-	-
38	1,50	54	2,13	6	90	20	300	60	900	1,47	0,98	-	-
51	2,00	68	2,68	6	90	20	300	60	900	2,03	1,36	-	-

Data refer to ambient temperature (20°C). Other diameters, wall thickness, cover colours and pressure only on specific request.