


TUPRESTIGE AQUA D



POTABLE
WATER

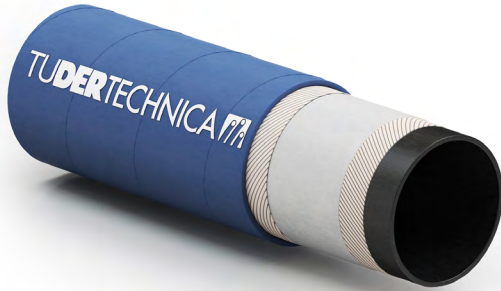

Premium grade low permeation delivery hose suitable for drinking water.

TUBE

IIR, black, tested in compliance with NSF/ANSI/CAN 61 Drinking Water System Components. Meets FDA 21 CFR 177.2600.

REINFORCEMENT

Synthetic plies.

COVER

Smooth, blue, cloth finish. Abrasion, ageing and ozone resistant

TEMPERATURE: -40°C / +120°C (-40°F / +248°F)

NORM: ISO 1307 for dimensional tolerances



Refer to guidelines for cleaning and sanitizing on TUDERTECHNICA.COM

| Inside diameter | | Outside diameter | | Vacuum | | Working pressure | | Burst pressure | | Appr. Weight | | Bending radius | |
|-----------------|------|------------------|------|--------|-----|------------------|-----|----------------|-----|--------------|--------|----------------|----|
| mm | in | mm | in | bar | psi | bar | psi | bar | psi | kg/mt | lbs/ft | mm | in |
| 13 | 0,50 | 23 | 0,91 | - | - | 10 | 150 | 40 | 600 | 0,33 | 0,22 | - | - |
| 19 | 0,75 | 29 | 1,14 | - | - | 10 | 150 | 40 | 600 | 0,43 | 0,29 | - | - |
| 25 | 1,00 | 35 | 1,38 | - | - | 10 | 150 | 40 | 600 | 0,54 | 0,36 | - | - |
| 32 | 1,25 | 42 | 1,65 | - | - | 10 | 150 | 40 | 600 | 0,68 | 0,46 | - | - |
| 38 | 1,50 | 48 | 1,89 | - | - | 10 | 150 | 40 | 600 | 0,79 | 0,53 | - | - |
| 51 | 2,00 | 64 | 2,52 | - | - | 10 | 150 | 40 | 600 | 1,44 | 0,97 | - | - |
| 63,5 | 2,50 | 76,5 | 3,01 | - | - | 10 | 150 | 40 | 600 | 1,73 | 1,16 | - | - |
| 76 | 3,00 | 89 | 3,50 | - | - | 10 | 150 | 40 | 600 | 2,03 | 1,36 | - | - |
| 102 | 4,00 | 115 | 4,53 | - | - | 10 | 150 | 40 | 600 | 2,66 | 1,79 | - | - |

Data refer to ambient temperature (20°C). Other diameters, wall thickness, cover colours and pressure only on specific request.